

# MEGAMAN® CONXENTO



MEGAMAN® CONXENTO is a compact recessed adjustable downlight for ceiling installation. This eco-friendly recessed downlight is a perfect home for LED PAR30 reflectors, AR111 reflectors and GX53 lamps, offering up to 40,000 hours lifetime for halogen downlight replacement. With the same high quality light intensity and colour rendering of traditional spotlights, but with no UV and negligible IR light radiation or residual glare, the MEGAMAN® CONXENTO is ideal for use in retail outlets, hotels, restaurants, galleries or residential applications.

With its adjustable design, MEGAMAN® CONXENTO provides flexibility for directional accent lighting. When fitted with MEGAMAN® LED lamps, it employs patented Thermal Conductive Highway™ technology which dissipates heat efficiently to prevent deterioration of the LED and the reflector design minimises glare.


- Eco-friendly recess fitting with LED PAR30 reflectors, AR111 reflectors and GX53 lamps to offer up to 40,000 hours lifetime for halogen downlight replacement
- Compact recessed downlights for vertical installation
- Offers visual comfort without glare
- Flexible directional lighting with adjustable angle
- Family of luminaires with recessed, track and surface mounted options\*
- Has options for different types of supply terminations, please refer to page 168 for details

\* Please refer to page 65 for surface mounted version and page 97 for track lighting version


#### Applications

- Retail outlets
- Hotels
- Restaurants
- Galleries
- Residential applications
- Corridors



F12301RC



F12217RC / F12239RC



L0503RC







White  
(WH21)  
(WH11 - L0503RC)

Silver  
(SV23)  
(SV31 - L0503RC)

Black  
(BK21)  
(BK12 - L0503RC)

Gold  
(GD21)  
(GD31 - L0503RC)

Model No.	Max. Wattage (W)	Dimension (mm)	Cut-Out (mm)	Light Source	Lamp Base	Materials	Weight (g)
F12301RC	15	Ø142 x H177	Ø125	LED PAR30	E27	Aluminium	315
F12217RC	15	Ø164 x H137	Ø145	LED AR111	GU10	Aluminium	390
F12239RC	15	Ø164 x H137	Ø145	LED AR111	G53	Aluminium	340
L0503RC	7	Ø132 x H66	Ø110	LED GX53	GX53	Polycarbonate	105

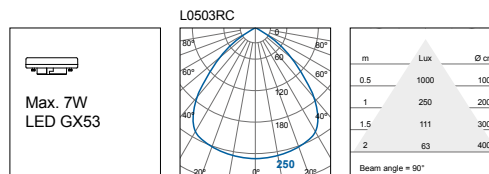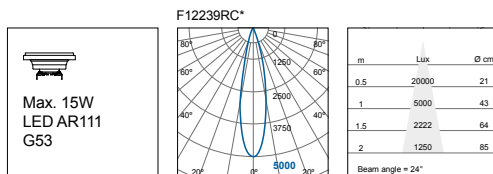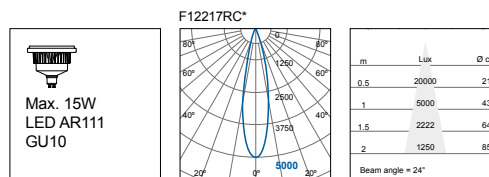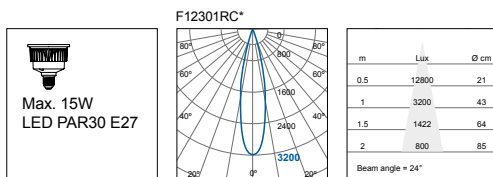

\* Please refer to page 151 for more light source information