

MEGAMAN® VERSOFIT



MEGAMAN® VERSOFIT provides fire protection that protects the integrity of the ceiling and prevents the spread of fire and smoke into the room above. MEGAMAN® VERSOFIT is compliant to BS476 Part 21 and is designed to withstand fire for up to 90 minutes when mounted in a timber and plaster board fire rated ceiling construction.

MEGAMAN® VERSOFIT works with a serviceable LED light engine allowing ultimate control. The TECOH® THx LED light engine can be removed for first fix on site and then added in quickly and easily via clip in connectors for final commissioning. If the building requirements change, the LED light engine can be upgraded or removed and replaced with another colour option or a higher performing option. Design features include easy click connectors, large push button terminals and loop in loop out features to save installation time and advanced thermal design to lower operating temperatures and extend life.

Features


- Designed to provide protection to the floor above in the case of fire for 90 minutes
- Fully compliant to BS476 Part 21
- Loop in loop out features to save installation time
- Advanced thermal design to lower operating temperatures and extend life
- Adjustable and fixed options available
- Works with serviceable TECOH® THx LED light engine, no external driver required
- Replacement light engine available separately, allowing upgrades or colour temperature change

Applications


- Restaurants
- Hotels
- Offices
- Kitchens
- Corridors

MEGAMAN® VERSOFIT



F28751RC




F28851RC



F28951RC



Model No.	Max. Wattage (W)	Dimension (mm)	Cut-Out (mm)	Light Source	Materials	Weight (g)
NEW F28751RC	8	Ø88 x L169 x H113	Ø74	TECOH® THx TH0106d	Steel body	264
NEW F28851RC	8	Ø90 x L170 x H110	Ø71	TECOH® THx TH0106d	Steel body	235
NEW F28951RC	8	Ø96 x L178 x H108	Ø85	TECOH® THx TH0106d	Steel body	340

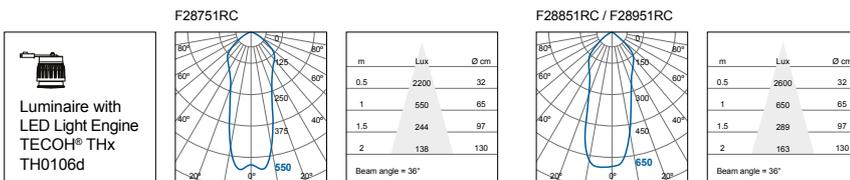

Specification of MEGAMAN® LED light engine TECOH® THx

Model No.	Voltage (V)	Wattage (W)	Luminous Flux (lm)	Luminous Efficacy (lm/W)	Luminous Flux in 90° cone	Max. Luminous Intensity (cd) [Beam Angle]	Colour Temp. [CRI]	Rated Life (hrs)	Dimmable	Energy Label
TH0106d	220-240	8	600 [2800K] 630 [4000K]	75 [2800K] 79 [4000K]	420 [2800K] 440 [4000K]	650 [36°]	2800K / 4000K [Ra80]	30,000	100-10%* [#]	A



Working with TECOH® THx LED Light Engine

Please refer to page 150 for more information on TECOH® THx

* Capable of linear dimming from 100% to 10% when working with most conventional dimmers..